

## TEST REPORT

on behalf of

Shanghai ZLAN Information Technology Co.,Ltd

Serial Device Server

Prepared For: Shanghai ZLAN Information Technology Co.,Ltd.

Room 1205, Building D Everbright Exhibition Center, No. 80

Caobao Road, Xuhui District, Shanghai, CN.

Prepared By: Shanghai Global Testing Services Co., Ltd.

No. 968 Meilong West Road, Minhang District, Shanghai, 201104

China

Report No.: TESH17051010843

Date of Test: May 10<sup>th</sup>, 2017 to May 19<sup>th</sup>, 2017

Date of Report: May 19<sup>th</sup>, 2017

**EN 55032:2012, EN 55024:2010+A1:2015,  
EN 61000-3-2:2014, EN61000-3-3:2013**


**EMC MEASUREMENT AND TEST REPORT**

FOR

**Shanghai ZLAN Information Technology Co.,Ltd**

Room 1205, Building D Everbright Exhibition Center, No. 80 Caobao Road, Xuhui District, Shanghai, CN

Name Of Sample..	Serial Device Server
Model.....	ZLAN5102, ZLAN5102-3, ZLAN5103, ZLAN5143, ZLAN5143B, ZLAN5143I, ZLAN5200, ZLAN5400, ZLAN5443A, ZLAN5800, ZLAN5G00A, ZLSN2000, ZLSN2002, ZLSN2003B, ZLSN2003S, ZLSN7004, ZLSN3003S, ZLAN7104, ZLAN8100, ZLAN9163, ZLAN9500, ZLAN9503, ZLAN6042, ZLAN6842, ZLAN1003.
Ratings.....	/
Date of Receipt...	2017-05-10
Date of Test.....	2017-05-10 to 2017-05-19
Test Engineer.....	Sophia Yu
Reviewed By.....	Linda lin
Approved By.....	Cristine Fang
<p>* The above equipment was tested by <b>Shanghai Global Testing Services Co., Ltd.</b> for compliance with the requirements set forth in the EMC Directive 2004/108/EC&amp;2014/30/EU and the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.</p>	

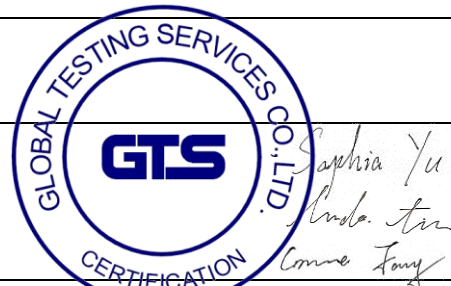

<b>Test Result</b>	<b>PASS</b>
--------------------	-------------

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION .....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE.....	4
EQUIPMENT MODIFICATIONS .....	4
<b>1 - EN61000-3-2: 2014 .....</b>	<b>5</b>
1.1 TEST EQUIPMENT LIST AND DETAILS .....	5
1.2 LIMITS.....	5
1.3 TEST PROCEDURE AND THE TEST SET-UP.....	5
1.4 TEST DATA AND RECORDS .....	6
1.5 VERDICT .....	6
<b>2 - EN61000-3-3: 2013.....</b>	<b>7</b>
2.1 TEST EQUIPMENT LIST AND DETAILS .....	7
2.2 LIMITS.....	7
2.3 TEST PROCEDURE AND THE TEST SET-UP.....	7
2.4 TEST DATA AND RECORDS .....	8
2.5 VERDICT .....	8
<b>3 - EN55032.....</b>	<b>9</b>
3.1 CONDUCTED DISTURBANCE AT THE MAINS TERMINALS.....	9
3.1.1 TEST EQUIPMENT LIST AND DETAILS .....	9
3.1.2 DESCRIPTION OF MEASUREMENT CONDITIONS .....	9
3.1.3 LIMITS FOR CONDUCTED DISTURBANCE AT THE MAINS TERMINAL OF CLASS B ITE.....	9
3.1.4 TEST PROCEDURE AND THE TEST SET-UP.....	10
3.1.5 TEST DATA AND RECORDS .....	10
3.1.6 VERDICT .....	10
3.2 CONDUCTED DISTURBANCE AT TELECOMMUNICATION PORTS.....	11
3.2.1 TEST EQUIPMENT LIST AND DETAILS .....	11
3.2.2 DESCRIPTION OF MEASUREMENT CONDITIONS .....	11
3.2.3 LIMITS FOR CONDUCTED DISTURBANCE AT THE MAINS TERMINAL OF CLASS B ITE.....	11
3.2.4 CONFIGURATION.....	11
3.2.5 TEST DATA AND RECORDS .....	11
3.2.6 VERDICT .....	11
3.3 RADIATION DISTURBANCES .....	12
3.3.1 TEST EQUIPMENT LIST AND DETAILS .....	12
3.3.2 DESCRIPTION OF MEASUREMENT CONDITIONS .....	12
3.3.3 LIMITS OF RADIATED DISTURBANCES OF CLASS B ITE AT A MEASURING DISTANCE OF 3M.....	12
3.3.4 TEST PROCEDURE AND THE TEST SET-UP.....	12
3.3.5 TEST DATA AND RECORDS .....	13
3.3.6 VERDICT THE EUT MET THE REQUIREMENT.....	13
<b>4 –EN55024 .....</b>	<b>14</b>
DESCRIPTION OF PERFORMANCE CRITERION ( ACCORDING WITH EN55024 SECTION 7.1 ) .....	14
4.1 SURGES.....	15
4.1.1 TEST EQUIPMENT LIST AND DETAILS .....	15
4.1.2 DESCRIPTION OF MEASUREMENT CONDITIONS .....	15
4.1.3 CONFIGURATION.....	15

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

4.1.4 TEST DATA AND RECORDS .....	15
4.1.5 VERDICT .....	15
4.2 ESD .....	16
4.2.1 TEST EQUIPMENT LIST AND DETAILS .....	16
4.2.2 DESCRIPTION OF MEASUREMENT CONDITIONS .....	16
4.2.3 CONFIGURATION .....	16
4.2.4 TEST DATA AND RECORDS .....	16
4.2.5 VERDICT .....	17
4.3 EFT/B .....	18
4.3.1 TEST EQUIPMENT LIST AND DETAILS .....	18
4.3.2 DESCRIPTION OF MEASUREMENT CONDITIONS .....	18
4.3.3 CONFIGURATION .....	18
4.3.4 TEST DATA AND RECORDS .....	18
4.3.5 VERDICT .....	18
4.4 RADIO-FREQUENCY CONTINUOUS CONDUCTED, 0.15 MHZ TO 80 MHZ .....	19
4.4.1 TEST EQUIPMENT LIST AND DETAILS .....	19
4.4.2 DESCRIPTION OF MEASUREMENT CONDITIONS .....	19
4.4.3 CONFIGURATION .....	19
4.4.4 TEST DATA AND RECORDS .....	19
4.4.5 VERDICT .....	19
4.5 VOLTAGE DIPS AND INTERRUPTIONS .....	20
4.5.1 TEST EQUIPMENT LIST AND DETAILS .....	20
4.5.2 DESCRIPTION OF MEASUREMENT CONDITIONS .....	20
4.5.3 CONFIGURATION .....	20
4.5.4 TEST DATA AND RECORDS .....	20
4.5.5 VERDICT .....	20
4.6 RADIO-FREQUENCY ELECTROMAGNETIC FIELD .....	21
4.6.1 TEST EQUIPMENT LIST AND DETAILS .....	21
4.6.2 DESCRIPTION OF MEASUREMENT CONDITIONS .....	21
4.6.3 CONFIGURATION .....	21
4.6.4 TEST DATA AND RECORDS .....	21
4.6.5 VERDICT .....	21
4.7 POWER-FREQUENCY MAGNETIC FIELD .....	22
4.7.1 TEST EQUIPMENT LIST AND DETAILS .....	22
4.7.2 DESCRIPTION OF MEASUREMENT CONDITIONS .....	22
4.7.3 CONFIGURATION .....	22
4.7.3 TEST DATA AND RECORDS .....	22
4.7.4 VERDICT .....	22

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The product that is produced by **Shanghai ZLAN Information Technology Co.,Ltd** test model: **ZLAN5102** the "EUT" as referred to in this report is a **Serial Device Server**.

### Objective

In order to meet the EMC requirements approved by CENELEC, the following standards will be cited:

1. EN61000-3-2:2014, EMC-Limits-Limits for the harmonic current emissions (equipment input current up to and including 16 A per phase).
2. EN61000-3-3:2013 , EMC-Limits-Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current  $\leq 16$  A per phase and not subject to conditional connection.
3. EN 55032:2012 Information technology equipment-Radio disturbance characteristics- Limits and methods of measurement.
4. EN 55024:2010+A1:2015 Information technology equipment-Immunity characteristics-Limits and methods of measurement.

The objective of the manufacturer is to demonstrate compliance with the limits for Information Technology Equipment -Limits and methods of measurement.

**Note:** The test data is only valid for the test sample. There is possible deviation from the original test data for other products

### Equipment Modifications

No modification to the EUT was made by **Shanghai Global Testing Services Co., Ltd** to make sure the EUT comply with applicable limits.

## 1 - EN61000-3-2: 2014

### 1.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Cal. Due date
1	Single phase harmonics&flicker analyzer	EM test	DPA500	V050710905	2016-12-03	2017-12-02
2	AC SOURCE 6KVA	EM test	ACS500	V050710405	2016-12-03	2017-12-02

### 1.2 Limits

Limits for Class A equipment


Harmonic order n	Maximum permissible harmonic current A
<b>Odd harmonics</b>	
3	2,30
5	1,14
7	0,77
9	0,40
11	0,33
13	0,21
$15 \leq n \leq 39$	$0,15 \frac{15}{n}$
<b>Even harmonics</b>	
2	1,08
4	0,43
6	0,30
$8 \leq n \leq 40$	$0,23 \frac{8}{n}$

### 1.3 Test procedure and the test set-up

#### Procedure

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- b. The classification of EUT is according to section 5 of EN 61000-3-2. The EUT is classified as follows:
  - Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.
  - Class B: Portable tools. Arc welding equipment which is not professional equipment
  - Class C: Lighting equipment, including dimming devices.
  - Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors.
- c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

#### Set-up

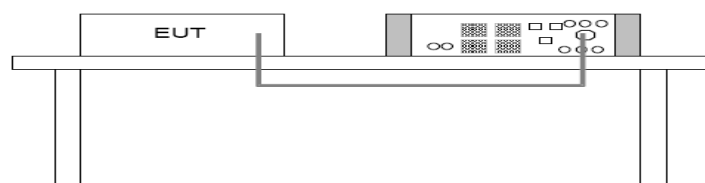

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

## 1.4 Test Data and Records

Test case does not apply to the test object(<80W)

## 1.5 Verdict

The EUT met the requirement.

## 2 - EN61000-3-3: 2013

### 2.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Cal. Due date
1	Single phase harmonics&flicker analyzer	EM test	DPA500	V050710905	2016-12-03	2017-12-02
2	AC SOURCE 6KVA	EM test	ACS500	V050710405	2016-12-03	2017-12-02

### 2.2 Limits

- The value of  $Pst$  shall not be greater than 1.0;
- The value of  $Plt$  shall not be greater than 0.65;
- The value of  $d(t)$  during a voltage change shall not exceed 3.3% for more than 500ms;
- The relative steady-state voltage change,  $dc$ , shall not exceed 3.3%;
- The maxim relative voltage change,  $dmax$ , shall not exceed 4%.

Notes:

$Pst$ : Short-term flicker indicator The flicker severity evaluated over a short period (in minutes);  $Pst=1$  is the conventional threshold of irritability;

$Plt$ : long-term flicker indicator; the flicker severity evaluated over a long period (a few hous) Using successive  $Pst$  values;

$dc$ : the relative steady-state voltage change ;

$dmax$ : maximum relative voltage change ;


$d(t)$ : the value during a voltage change .

### 2.3 Test procedure and the test set-up

#### Procedure

- a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- b. During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

#### Set-up

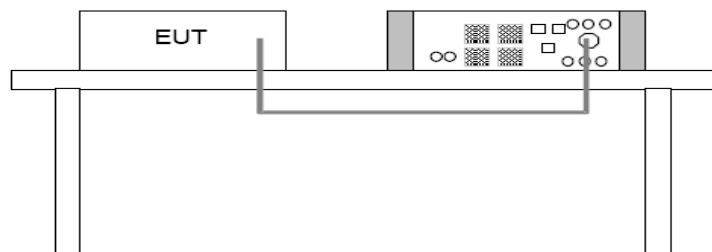

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.



## 2.4 Test Data and Records

Flicker	Limit	Value
Short-term flicker Indicator Pst	1.0	0.273
Long -term flicker Indicator Plt	0.65	0.128

Voltage fluctuation	Limit	Value
Relative voltage change characteristic(dt)	500ms	0
Max relative voltage change characteristic(dmax)	6%	0.235%

Result: PASSED

## 2.5 Verdict

The EUT met the requirement.

### 3 - EN55032

#### 3.1 Conducted disturbance at the Mains Terminals.

##### 3.1.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESCS25	1005426	2016-09-04	2017-09-03
2	Line impedance stabilization network	SCHWARZBECK	NSLK838	8127-350	2016-12-08	2017-12-07

##### 3.1.2 Description of Measurement Conditions

Temperature: 21 °C

Humidity: 58%

Pressure: 1033mbar

Electromagnetic environment: normal


##### 3.1.3 Limits for conducted disturbance at the mains terminal of class B ITE

Frequency range MHz	Limit values dB(μV)	
	Quasi-peak	Average
0.15 to 0.5	66~56	56~46
0.5 to 5	56	46
5 to 30	60	50



NOTE 1: The lower limit shall apply at the transition frequencies.  
NOTE 2: The limit decreases linearly with the frequency in the range 0,15 MHz to 0,50 MHz.

### 3.1.4 Test procedure and the test set-up

The configuration is in accordance with the requirement in EN55022, the sketch map as follow:

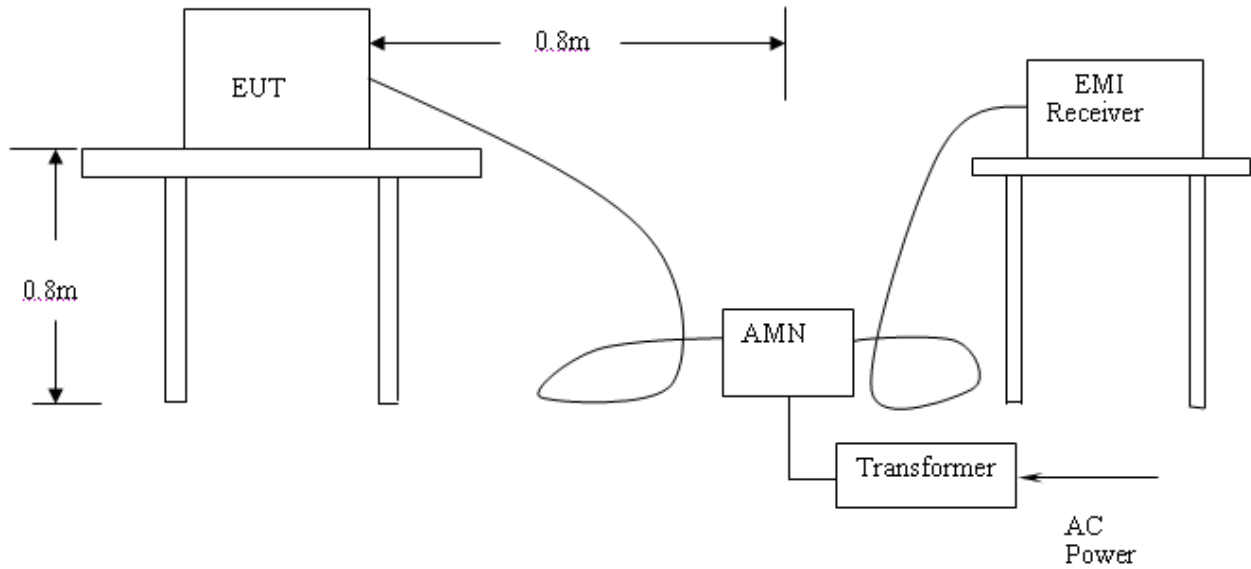

### 3.1.5 Test Data and Records

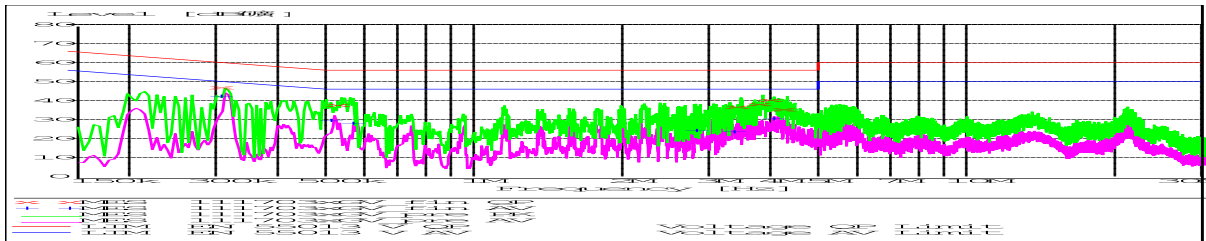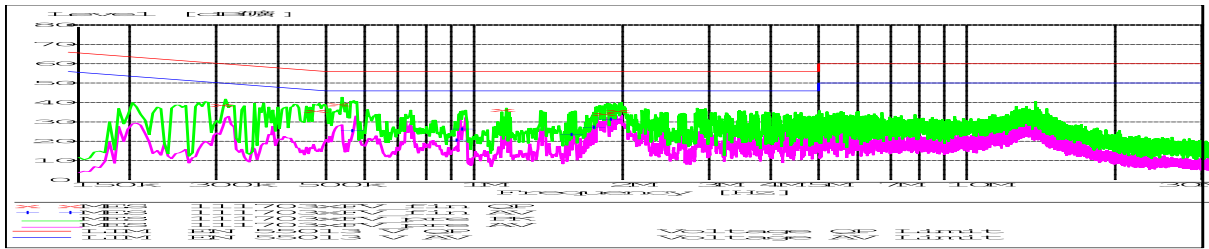

### 3.1.6 Verdict

The EUT met the requirement.

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

### 3.2 Conducted disturbance at telecommunication ports

#### 3.2.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESCS25	1005426	2016-06-04	2017-06-03
2	Line impedance stabilization network	SCHWARZBECK	NSLK838	8127-350	2016-12-08	2017-12-07

#### 3.2.2 Description of Measurement Conditions

Temperature: 20°C

Humidity: 60%

Pressure: 1033mbar

Electromagnetic environment: normal

#### 3.2.3 Limits for conducted disturbance at the mains terminal of class B ITE.

Frequency range MHz	Limit values dB(μV)	
	Quasi-peak	Average
0.15 to 0.5	84~74	74~64
0.5 to 30	74	64

NOTE 1: The lower limit shall apply at the transition frequencies.  
NOTE 2: The limit decreases linearly with the frequency in the range 0,15 MHz to 0,50 MHz.

#### 3.2.4 Configuration

The configuration is in accordance with the requirement in EN55022

#### 3.2.5 Test Data and Records

Test case does not apply to the test object

#### 3.2.6 Verdict

The EUT met the requirement.

### 3.3 Radiation Disturbances

#### 3.3.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100987	2016-12-03	2017-12-02
2	Antenna	SCHWARZBECK	VULB9168	9168-493	2016-12-03	2017-12-02
3	CONTROLLER	INNCO	CO200	722	/	/

#### 3.3.2 Description of Measurement Conditions

Temperature: 20°C

Humidity: 60%

Pressure: 1033mbar

Electromagnetic environment: normal

#### 3.3.3 Limits of radiated disturbances of class B ITE at a measuring distance of 3m.

Frequency range MHz	Quasi-peak limits(3m) dB(μV/m)
30 to 230	40
230 to 1000	47

NOTE: The lower limit shall apply at the transition frequency.  
NOTE: Additional provisions may be required for cases where interference occurs.

#### 3.3.4 Test procedure and the test set-up


##### Procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m semi/full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be retested one by one using the quasi- peak method or average method as specified and then reported In Data sheet peak mode and QP mode.



Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

**Set-up**

The configuration is in accordance with the requirement in EN 55032, the sketch map as follow:

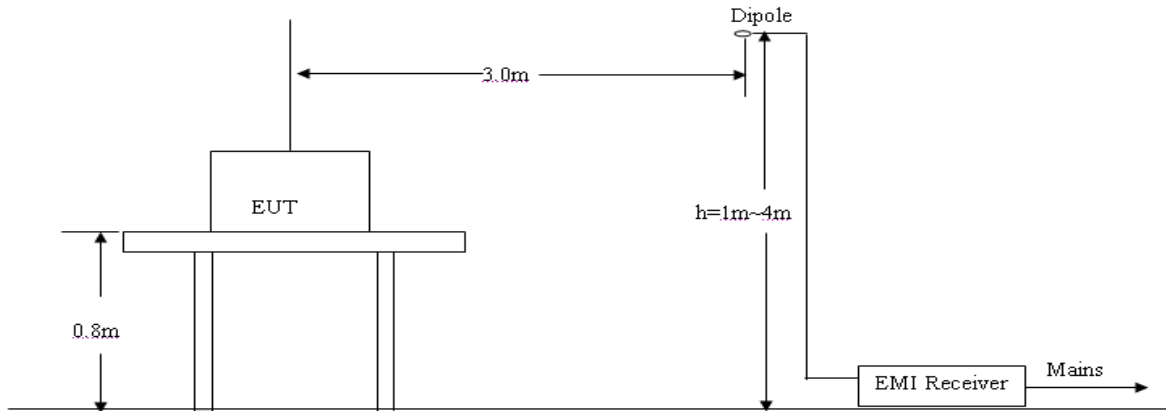

**3.3.5 Test Data and Records**

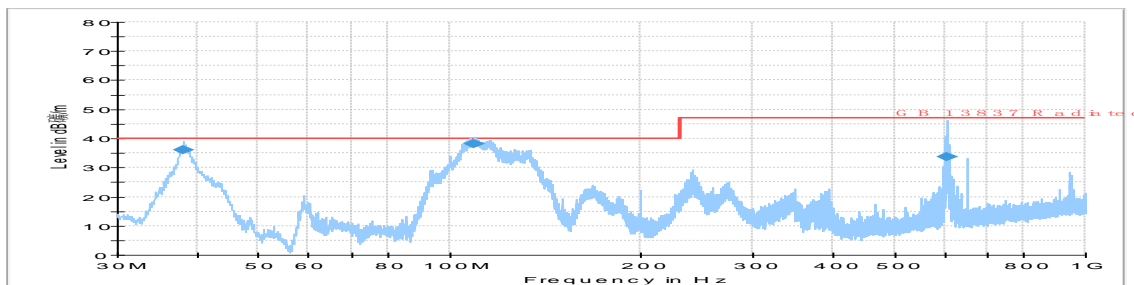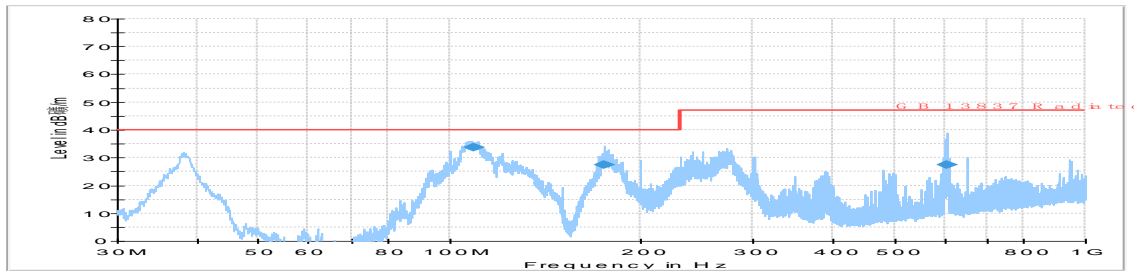

**3.3.6 Verdict**

The EUT met the requirement.

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

## **4 –EN55024**

---

### **Description of Performance Criterion ( According with EN55024 Section 7.1 )**

#### **Performance Criterion A**

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user reasonably expects from the equipment if used as intended.

#### **Performance Criterion B**

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### **Performance Criterion C**

Loss of function is allowed, provided the function is self-recoverable, or restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

Function and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost

### 4.1 SURGES


#### 4.1.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Cal. date	Due
1	Ultra-compact simulator	EM test	UCS500M4	V050710012 2	2016-10-08	2017-10-07	

#### 4.1.2 Description of Measurement Conditions

Temperature: 21 °C  
 Humidity: 58%  
 Pressure: 1033mbar  
 Electromagnetic environment: normal

#### 4.1.3 Configuration

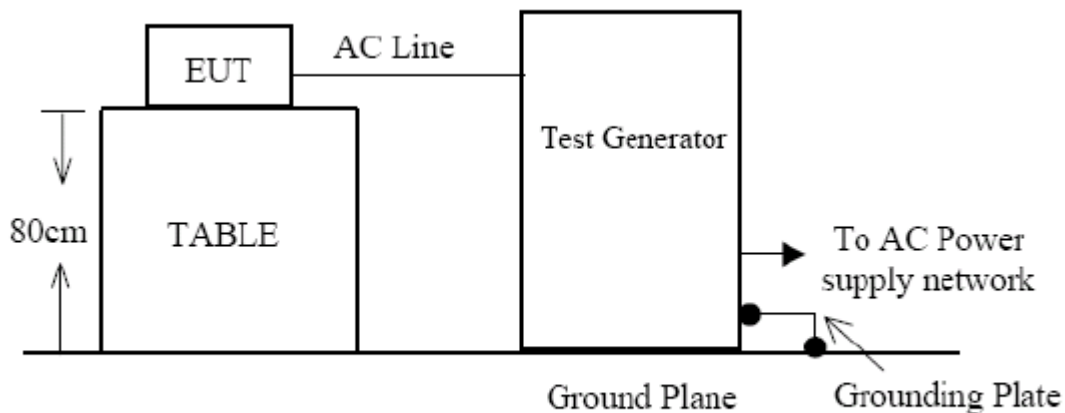

Remark: Test generator includes control center, surge combination and coupler.

#### 4.1.4 Test Data and Records

Level	Voltage	Poll	Phase angle	Path	Pass	Fail
1	1.0kV	±	0°, 90°, 180°, 270°	L-N	B	

#### 4.1.5 Verdict

The EUT was working as normal, so they met the requirement of performance criteria B.



## 4.2 ESD

### 4.2.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Cal. date	Due
1	Electrostatic Discharge Simulator	KIKUSUI	KES4021	LL004798	2016-12-25	2017-12-24	

### 4.2.2 Description of Measurement Conditions

Temperature: 21 °C  
 Humidity: 58%  
 Pressure: 1033mbar  
 Electromagnetic environment: normal

### 4.2.3 Configuration

The configuration is in accordance with the requirement in EN61000-4-2, see the photo in appendix.

### 4.2.4 Test Data and Records

#### Air Discharge

EN61000-4-2 Test Points	Test Levels															
	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV	-10 kV	+10 kV	-12.5 kV	+12.5 kV	-15 kV	+15 kV	-20 kV	+20 kV
EUT Front Side	B	B	B	B	B	B	B	B								
EUT Top Side	B	B	B	B	B	B	B	B								
EUT Back Side	B	B	B	B	B	B	B	B								
EUT Left Side	B	B	B	B	B	B	B	B								
EUT Right Side	B	B	B	B	B	B	B	B								

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

Direct Contact

Test Levels																
EN61000-4-2 Test Points	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV	-10 kV	+10 kV	-12.5 kV	+12.5 kV	-15 kV	+15 kV	-20 kV	+20 kV
EUT Front Side	B	B	B	B												
EUT Top Side	B	B	B	B												
EUT Back Side	B	B	B	B												
EUT Left Side	B	B	B	B												
EUT Right Side	B	B	B	B												

**4.2.5 Verdict**

The EUT was working as normal, so they met the requirement of performance criteria B.

### 4.3 EFT/B

#### 4.3.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Cal. date	Due
1	Ultra-compact simulator	EM test	UCS500M4	V050710012 2	2016-09-04	2017-09-03	

#### 4.3.2 Description of Measurement Conditions

Temperature: 21 °C  
 Humidity: 58%  
 Pressure: 1033mbar  
 Electromagnetic environment: normal

#### 4.3.3 Configuration

The configuration is in accordance with the requirement in EN61000-4-4, see the photo in appendix.

#### 4.3.4 Test Data and Records

Test Levels (kV)									
EN61000-4-4 Test Points		+0.25	-0.25	+0.5	-0.5	+1.0	-1.0	+2.0	-2.0
Power Port of EUT	L	B	B	B	B	B	B		
	N	B	B	B	B	B	B		
	L+N	B	B	B	B	B	B		

#### 4.3.5 Verdict

The EUT was working as normal, so they met the requirement of performance criteria B.

#### 4.4 Radio-frequency continuous conducted, 0.15 MHz to 80 MHz


##### 4.4.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Cal.Due date
1	AM/FM signal generator	AEROFLEX	2023A	202306/668	2016-10-21	2017-10-20
2	PAMP Conducted RF test system	HAEFFLY	PAMP250	151730	2016-10-21	2017-10-20
3	CDN impedance and K-factor	LUTHI	L-801 M2/M3	9931	/	/

##### 4.4.2 Description of Measurement Conditions

Temperature: 22°C  
 Humidity: 59%  
 Pressure: 1033mbar  
 Electromagnetic environment: normal

##### 4.4.3 Configuration

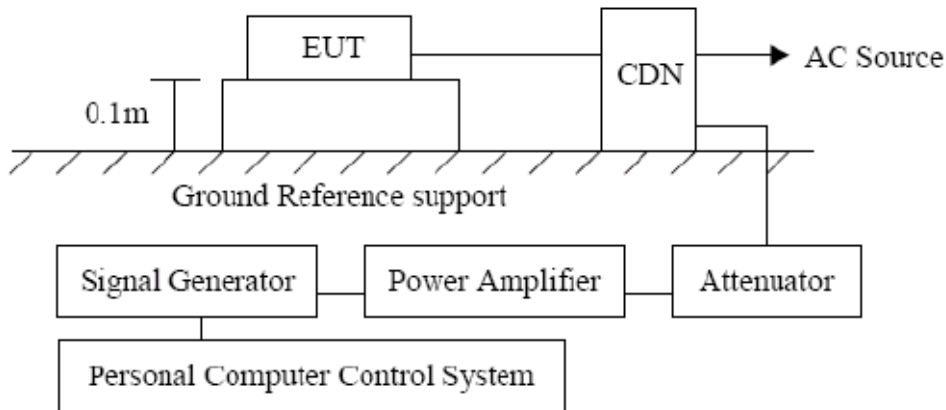

##### 4.4.4 Test Data and Records

EN61000-4-6 Test Points	Frequency range MHz	Levels	Voltage Level (e.m.f.)V	Pass	Fail
Power Line	0.15-80MHz	1	1		
		2	3	A	
		3	10		
		X	Special		

##### 4.4.5 Verdict

The EUT was working as normal, so they met the requirement of performance criteria A.

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

## 4.5 VOLTAGE DIPS AND INTERRUPTIONS


### 4.5.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Cal. Due date
1	Ultra-compact simulator	EM test	UCS500M4	V0507100789	2016-10-08	2017-10-07
2	Motorised Variac	EM test	MV2616	V0507100459	2016-10-08	2017-10-07

### 4.5.2 Description of Measurement Conditions

Temperature: 21 °C  
 Humidity: 58%  
 Pressure: 1033mbar  
 Electromagnetic environment: normal

### 4.5.3 Configuration

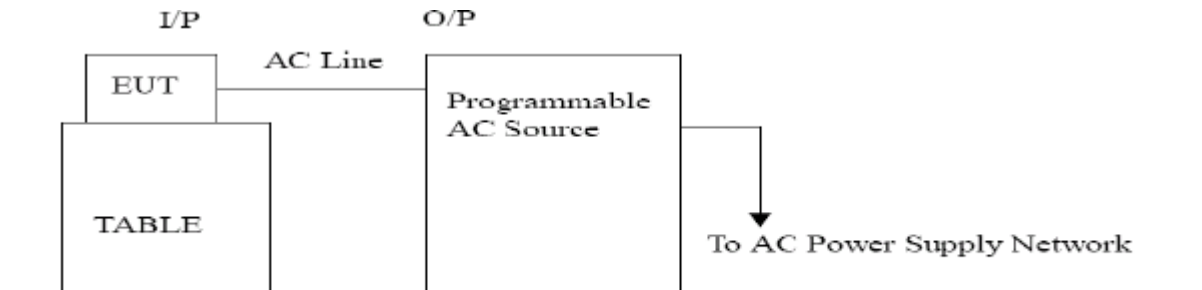

### 4.5.4 Test Data and Records

Environmental phenomena		Test level in % $U_T$	Duration (in periods of the rated frequency)	Phase Angle	Pass	Fail
Interruptions	>95	<5	250T	0/180	<b>C</b>	
Voltage dips in % $U_T$	>95	<5	0.5T	0/180	<b>B</b>	

### 4.5.5 Verdict

The EUT was working as normal, so they met the requirement of performance criteria C.

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

## 4.6 Radio-frequency electromagnetic field


### 4.6.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. date	Due
1	Ultra broadband antenna	Rohde & Schwarz	HL562	100944	2016-12-8	2017-12-7	
2	amplifier	AR	30W1000B	0327284	--	--	
3	amplifier	AR	30S1G3	0324978	--	--	
4	power meter	Rohde & Schwarz	NRP	101641	2016-08-05	2017-08-04	
5	Signal generator	Rohde & Schwarz	SMR40	100657	2016-10-08	2017-10-07	

### 4.6.2 Description of Measurement Conditions

Temperature: 20°C  
 Humidity: 60%  
 Pressure: 1033mbar  
 Electromagnetic environment: normal

### 4.6.3 Configuration

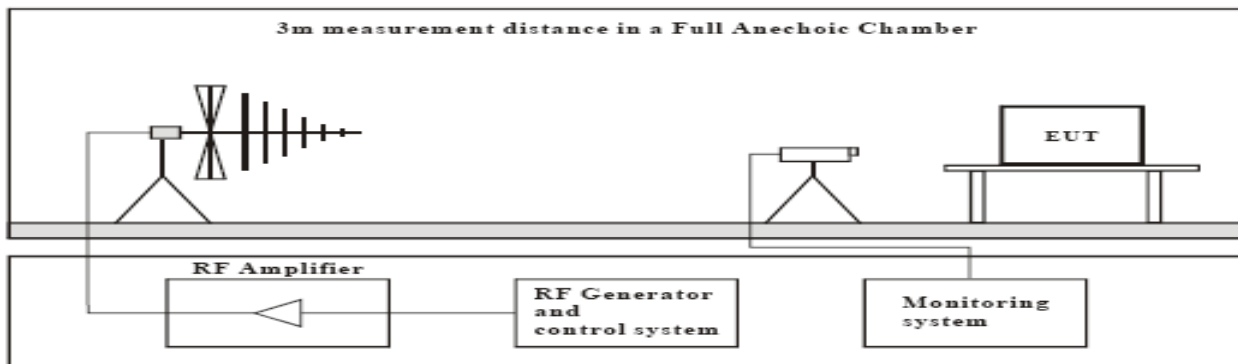

### 4.6.4 Test Data and Records

Frequency Range (MHz)	Front Side (3 V/m)		Rear Side (3 V/m)		Left Side (3 V/m)		Right Side (3 V/m)	
	VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	A	A	A	A	A	A	A	A

### 4.6.5 Verdict

The EUT was working as normal, so it met the requirement of performance criteria A.

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

## 4.7 Power-frequency magnetic field

### 4.7.1 Test Equipment List and Details

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	Magnetic field tester	HAEFELY TEST AG	MGA 100	152676	2016-12-8	2017-12-7
2	Active loop	EMCO	6502	9003-2484	2016-12-8	2017-12-7

### 4.7.2 Description of Measurement Conditions


Temperature: 22°C

Humidity: 59%

Pressure: 1033mbar

Electromagnetic environment: normal

### 4.7.3 Configuration

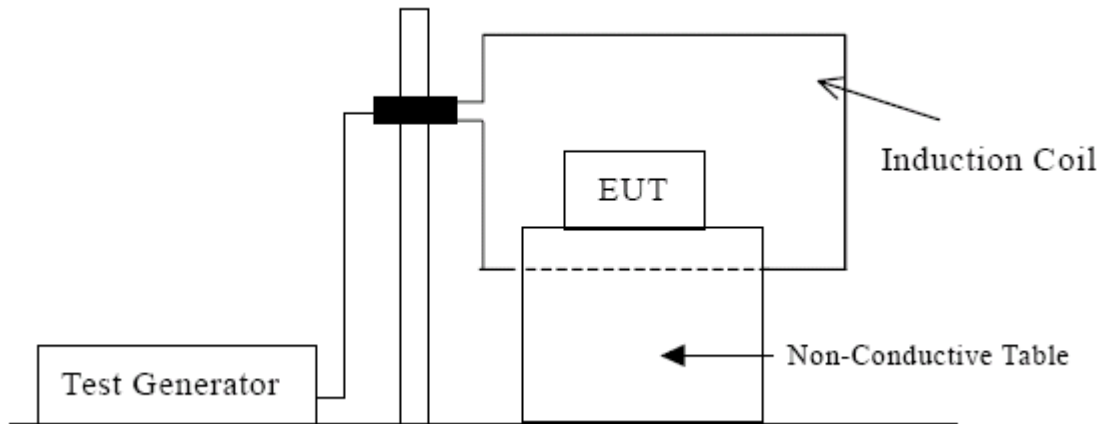

### 4.7.3 Test Data and Records

Power Frequency Magnetic Field	Testing Duration	Coil Orientation	Pass
50Hz, 60 Hz 3 A/m	1 Min	X-axis	A
50Hz, 60 Hz 3 A/m	1 Min	Y-axis	A
50Hz, 60 Hz 3 A/m	1 Min	Z-axis	A

### 4.7.4 Verdict

The EUT was working as normal, so it met the requirement of performance criteria A.

--- End of Test Report ---

Note: This report shall not be reproduced except in full, without the written approval of **Shanghai Global Testing Services Co., Ltd.** This document may be altered or revised by **Shanghai Global Testing Services Co., Ltd.** personnel only, and shall be noted in the revision section of the document.

Type of equipment, model: Serial Device Server, ZLAN5102, ZLAN5102-3, ZLAN5103, ZLAN5143, ZLAN5143B, ZLAN5143I, ZLAN5200, ZLAN5400, ZLAN5443A, ZLAN5800, ZLAN5G00A, ZLSN2000, ZLSN2002, ZLSN2003B, ZLSN2003S, ZLSN7004, ZLSN3003S, ZLAN7104, ZLAN8100, ZLAN9163, ZLAN9500, ZLAN9503, ZLAN6042, ZLAN6842, ZLAN1003.

Details of:

View:

general

front

rear

right

left

top

bottom



Details of:

View:

general

front

rear

right

left

top

bottom





Details of:

View:

general

front

rear

right

left

top

bottom



Details of:

View:

general

front

rear

right

left

top

bottom



Details of:

View:

general

front

rear

right

left

top

bottom



- End of Annex I -